

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 15 TOWNSHIP 14 RANGE 5

DATE: -2-25-02 8-14-07

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison



METHOD OF ESTABLISHMENT: County: 7-8-97

IN. S.P.C. E ZONE NAD '83

NAME: 14051504

N: 489830.5080(m)

E: 73887.6175(m)

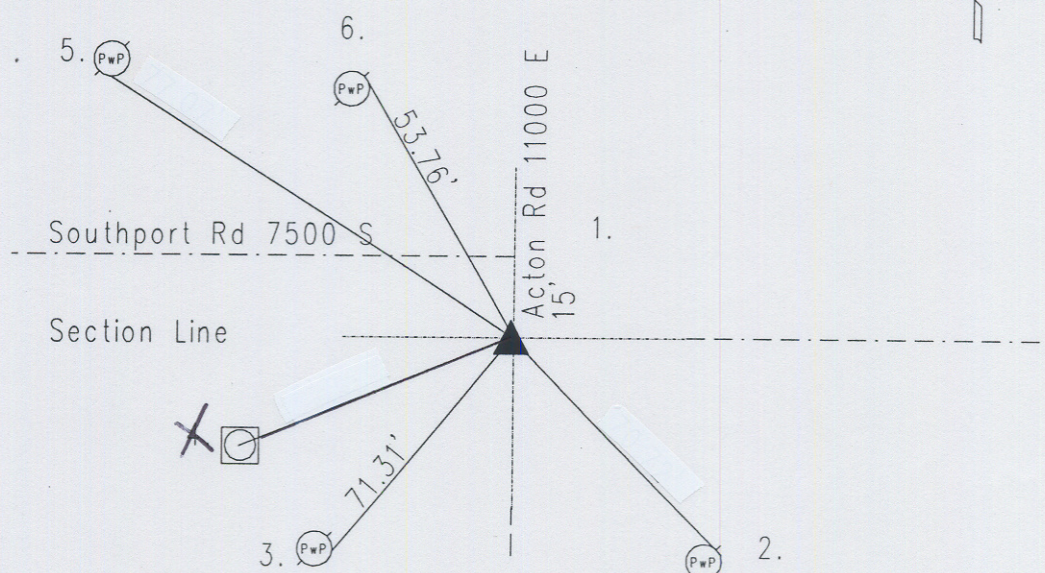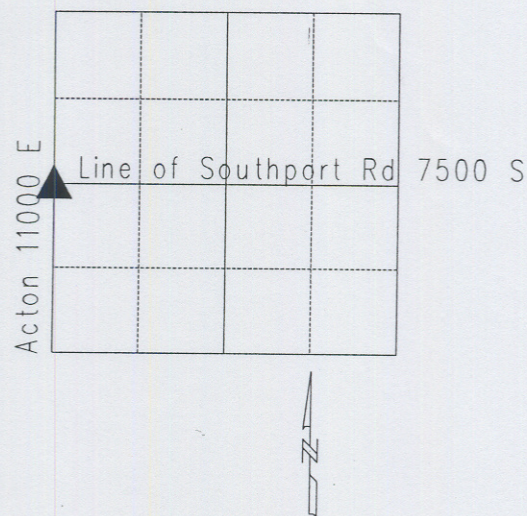

Original post set 1820 by Hendricks with witnesses: 14" beech N 24 E 23 links; 6" dgowood S 24 W 12 links per Marion County Atlas pg. 13. Hosbrook 12-14 thru 15-1853 called no stone but witness: 22" beech N 26 E 32 links; 10" beech S 51 E 18 1/2 links per Franklin Township Legal Survey Book pg. 39. Monroe 11-13-59 called sq. copper plug w/ cut 'x'. Monroe 9-28-60 called same. SeFranka 5-26-70 called same. Straber 12-16-71 called same. Wilcoxon 2-7-80 called PK nail over square copper plate with cut 'x'. Wilcoxon 11-16-84 called 2" sq. plate. Greene 3-1-90 called brass plug. Whiteside 1-13-95 called 2" sq. plate. Excavated by Kiste 7-8-97 and 2" sq. brass plug fd 8" dn. Harrison set. Re -tied 7-8-97 by Kiste. Re-tied 2-25-02 by Wilcoxon.
14051504

REF.	DISTANCE	DESCRIPTION
1.	15' +/-	Due N to C./L of Southport Rd 7500 S
2.	70.85'	PK nail E PwP#232-801 8"up
3.	71.31'	PK nail E PwP#48-801 D 12"up
4.	27.55'	Cut 'x' W concrete grade inlet
5.	77.14'	PK nail S PwP#46-7710 12"up
6.	53.76'	PK nail NE PwP#40-771 12"up